

# Speed dôme analogique extérieur, IR 100m, zoom X36, 650/700TVL


Réf. : VZ-2AF7268-A



## Key features

- 1/4" Sony CCD / 1/3" Sony CCD
- 700TVL horizontal resolution
- 36X / 23X optical zoom, 16X digital zoom
- Smart tracking
- Up to 150m IR distance
- True Day/Night, Digital WDR
- 3D intelligent positioning

## Dimensions

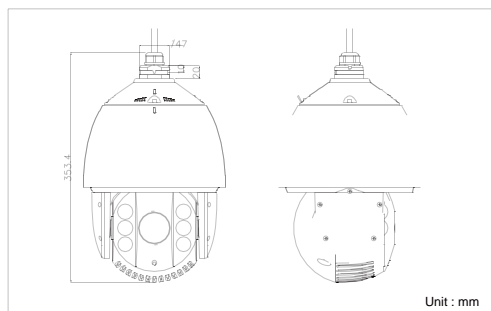

<b>Camera</b>	
Image Sensor	1/4" Interline Transfer CCD
Effective Pixel	PAL: 976(H)×582(V)
Horizontal Resolution	Color: 700 TVL, B/W: 750 TVL
Min. illumination	Color: 0.02Lux/(F1.6, AGC ON), 0.0008Lux/(F1.6, AGC ON, IRE×256), 0 lux with IR B/W: 0.002Lux/(F1.6, AGC ON), 0.0008Lux/(F1.6, AGC ON, IRE×256), 0 lux with IR
White Balance	Auto / Manual / ATW / Indoor / Outdoor
AGC	Auto / Manual
S / N Ratio	≥ 50dB
Digital Noise Reduction	3D DNR
Backlight compensation	BLC
Wide Dynamic Range	Digital WDR
Shutter Speed	PAL: 1/3 ~ 1/10,000s
Day & Night	IR Cut Filter
Digital Zoom	16X
Privacy Mask	8 privacy masks programmable, optional multiple colors and mosaics
Focus Model	Auto / Semiautomatic / Manual
<b>Lens</b>	
Focal Length	3.3 ~ 119mm, 36X
Zoom Speed	Approx. 6.0 s(Optical Wide-Tele)
Angle of View	57.1~1.7 degree(Wide-Tele)
Min. Working Distance	10 ~ 1500mm (Wide-Tele)
Aperture Range	F1.4 ~ F4.2
<b>Pan and Tilt</b>	
Smart tracking	Support
Pan / Tilt Range	Pan: 360°endless; Tilt: -2° ~ 90° (Auto Flip)
Pan / Tilt Speed	Pan Manual Speed: 0.1° ~ 160°/s, Pan Preset Speed: 240°/s Tilt Manual Speed: 0.1° ~ 120°/s, Tilt Preset Speed: 200°/s
Proportional Zoom	Rotation speed can be adjusted automatically according to zoom multiples
Number of Preset	256
Patrol	8 patrols, up to 32 presets per patrol
Pattern	4 patterns, with the total recording time not less than 10 minutes
Power-off Memory	Support
Park Action	Preset / Patrol / Pattern / Pan / Tilt / Auto / Random / Frame / Panorama scan
PTZ Position Display	Support
Password Protection	Support
Preset Freezing	Support
Zone Scanning/Display	Scanning within programmed zone, display zone title
Camera Title	Programmable title display
Compass	Support, the north can be set
Scheduled Task	Preset / Patrol / Pattern / Pan / Tilt / Auto / Random / Frame / Panorama scan
<b>Infrared</b>	
IR Range	Up to 150m
IR irradiating angle	Automatically adjusted, depending on the zoom ratio
<b>Alarm</b>	
Alarm Input	2 (7 alarm inputs optional)
Alarm Output	2 relay outputs, alarm response actions configurable
Alarm Action	Preset / Patrol / Pattern / Pan scan / Tilt scan / Random scan / Frame scan / Panorama scan / Relay output
<b>Input/ Output</b>	
Video Output	1.0V[p-p] / 75Ω, PAL / NTSC composite, BNC
<b>General</b>	
RS-485 Protocols	HIKVISION, Pelco-P, Pelco-D, self-adaptive
Power	24 VAC, max.50W
Working Temperature	-30°C ~ 65°C (-22°F ~ 149°F)
Humidity	90% or less
Protection Level	IP66 TVS 4,000V lightning protection, surge protection and voltage transient protection
Dimensions	Φ245 × 399mm (Φ9.65" × 15.71" )
Weight	Approx. 5.5kg(12.13lbs)



Réf. : VZ-1601ZJ



Réf. : VZ-1601ZJ-CORNER



Réf. : VZ-1601ZJ-POLE



Réf. : VZ-1634ZJ



Réf. : VZ-1662ZJ