


Serveur IP

8 flux 4CIF ou 4 flux 720p/25ims ou 2 flux 1080p/25ims *Réf. : VZ-9508NI-ST*

16 flux 4CIF ou 8 flux 720p/25ims ou 4 flux 1080p/25ims *Réf. : VZ-9516NI-ST*



Model		DS-9508NI-ST	DS-9516NI-ST
Video input	IP video input	8-ch	16-ch
Encoding Parameters	Recording resolution	5MP/3MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2 CIF/CIF/QCIF	
Hard disk	SATA	8 SATA interfaces	
	eSATA	1 eSATA interface	
	Capacity	Up to 4TB capacity for each HDD	
External interface	Network interface	2 RJ-45 10 /100 /1000 Mbps self-adaptive Ethernet interfaces	
	Serial interface	1 RS-232 interface (for parameters configuration, maintenance, transparent channel); 1 RS-485 interface; 1 RS-485 keyboard interface (for special keyboard control)	
	USB interface	3 × USB 2.0	
	Alarm in	16	
	Alarm out	4	
	General	Power supply	100 ~ 240 VAC, 6.3 A, 50 ~ 60 Hz
Consumption (without hard disk or DVD-R/W)		≤ 45 W	
Working temperature		-10 °C ~ +55 °C	
Working humidity		10 % ~ 90 %	
Chassis		19-inch rack-mounted 2U chassis	
Dimensions (W × D × H)		445 × 470 × 90 mm (17.52" × 18.5" × 3.54")	
Weight		≤ 8 Kg (17.64 lb) (without hard disk or DVD-R/W)	

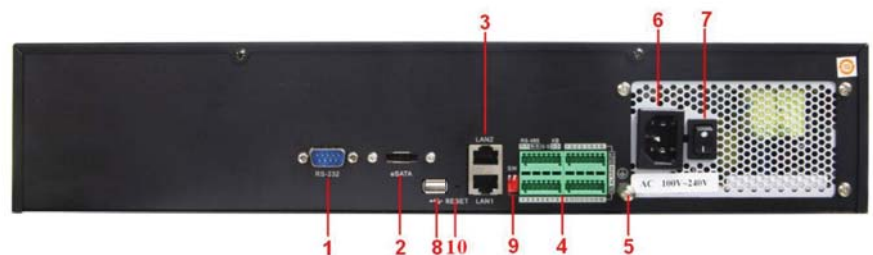

- ① RS-232 Serial Interface
- ② eSATA Interface
- ③ LAN1, LAN2 Network Interface
- ④ RS-485 Serial Interface, Keyboard Interface, ALARM IN and ALARM OUT
- ⑤ GND
- ⑥ 100~240VAC Power Input
- ⑦ Power Switch
- ⑧ USB Interface
- ⑨ Terminal Switch
- ⑩ Reset